

## Extraction Arm NEX S D=125

Extraction arm that fulfills all requirements for use in environments containing explosive dust and gas, and with extremely high hygienic demands.



The NEX S arm fulfills all requirements for use in environments containing explosive dust and gas, and with extremely high hygienic demands. It has a double-earthed system and antistatic earthed ventilation hose that prevents static electricity and sparks. Open support arm system and hood of acid proofed polished stainless steel requires a minimum of maintenance and makes it easy to clean. The NEX S is not marked with the EX symbol since it does not fall under the scope of the directive 2014/34/EU. Even if it does not have the EX marking, it is highly suitable for use in zones 1/21, 2/22 according to ATEX-work directive 1999/92/EC. The arm is double-earthed, by the helix in the hose and through the arm system. The hose is made of antistatic Polyurethane.

- **Minimum maintenance**
- **Easy to clean**
- **Double earthed**
- **Flexible arm, easy to position**
- **Recommended for use in explosive environments, zone 1/21, 2/22**

<b>Product name</b>	Extraction Arm NEX S D=125
<b>Noise level (dB(A))</b>	65-71
<b>Installation</b>	[Indoor]
<b>Fume temperature</b>	Max 70°C (158 F)
<b>Extraction arm diameter (mm)</b>	125
<b>Airflow (m3/h)</b>	1000
<b>Colour</b>	




# Extraction Arm NEX S D=125

Description	Arm length (m)	Weight (kg)	[model]
Extractor arm Nex stainless	2	13	10520232
Extractor arm Nex stainless	3	14	10520332
Extractor arm Nex stainless	4	22	10520432
Extractor arm Nex stainless with damper	2	13	10521832
Extractor arm Nex stainless with damper	3	14	10521932
Extractor arm Nex stainless with damper	4	22	10522032

## Extraction Arm NEX S D=125

[accessory]		[partno]
	Extension set 0,6m Nex S	10512232

## Extraction Arm NEX S D=125

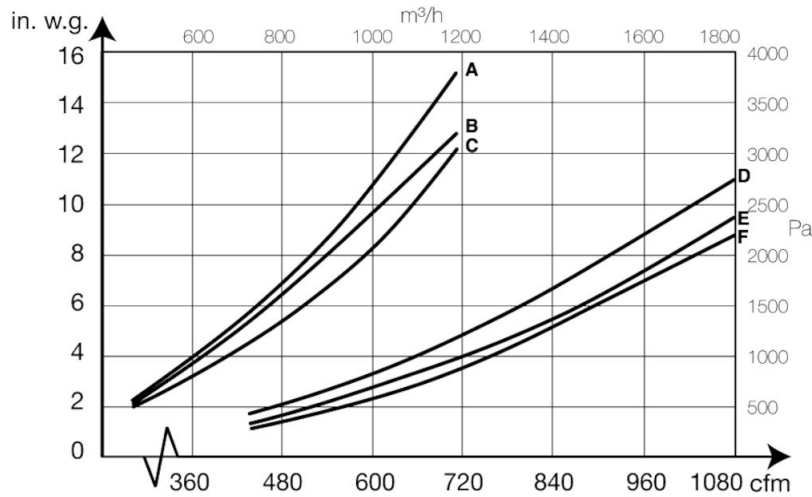

X: airflow m³/h Y: static pressure Pa A= 4 m Ø125 mm, B= 3 m Ø125 mm, C= 2 m

Ø125 mm, D= 4 m Ø160 mm, E= 3 m Ø160 mm, F= 2 m Ø160 mm

